



# AIRTRAC®-E


## Configuration



Areté's AIRTRAC-E is a ruggedized laser with >30mJ pulse energy. The AIRTRAC-E provides key laser pulse energy and pulse width capabilities over the full MIL-SPEC temperature range. The condensed size and full system weighing less than 220 grams establishes the AIRTRAC-E as a new low weight standard for lasers of this class.



AIRTRAC-E Cavity

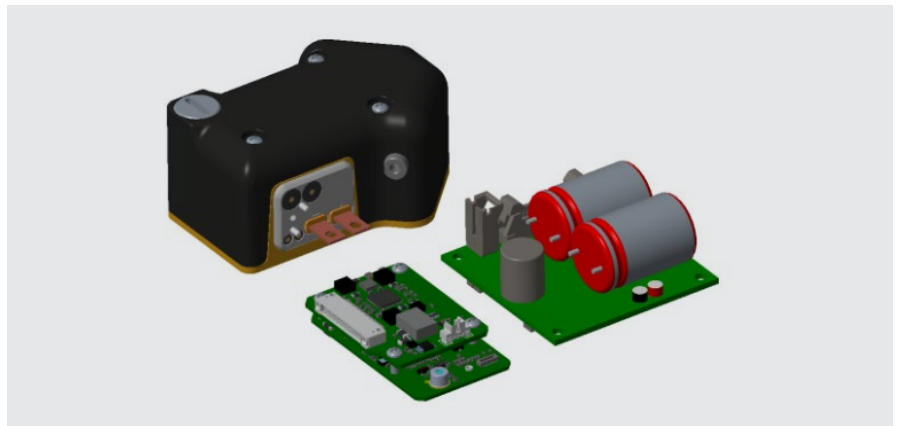

Electronics and laser cavity are at the same scale.

### Electronic Components

Component Name and Part Number	Qty Needed for System
Diode Driver 2 Capacitor Version	1
AIRTRAC Control Stack, P/N 101825-0001	1

### Telescope Options and Beam Divergence

Available Telescopes*	Divergence
6X	< 250 urad
5X	< 300 urad
3X	< 500 urad

\*Custom telescopes or customer design can be considered



POC: | [Airtrac.Sales@arete.com](mailto:Airtrac.Sales@arete.com)  
Business POC: Jay Rouse, (571) 255-4035 | [jrouse@arete.com](mailto:jrouse@arete.com)  
Areté | 9301 Corbin Ave. Northridge, CA 91324 | [arete.com](http://arete.com)

